ISO9001 UL CE RoHS

ER13460

3.6v Primary Lithium Thionyl Chlorde High Energy Bobbin Battery

Benefits

- High energy density
- High voltage, stable during most of the application's lifetime
- Wide range of operating temperature[-55℃～+ 85℃]
- Low self-discharge rate [less than 1% per year of storage]
- Long storage life [10 years under normal room temperature]

Main application

- Intelligent Instrument and meter
- Memory and standby power
- Alarms and security devices
- Automotive electronics
- Electronic toll collection
- Military devices

Electrical characteristics (23±2℃)

Nominal capacity	1.5Ah
Nominal voltage	3.6V
Maximum recommended continuous current	10mA
Maximum recommended pulse current	20mA
Operating temperature range	-55°C~+85°C

UL U.L. Component Recognition MH 29130

Physical characteristics

Diameter[max]	13.5mm
Height[max]	46.0mm
Typical weight	14g

Available terminations

S: Standard termination
T: Solder tabs
P: Axial pins
Special termination are available upon request.

MSDS is available upon request.

Wuhan Voltec Energy Sources Co.,Ltd.
Add: Wuhan zhongyuanChangjiang Scientific Tecnology park, Nansan Road, Hannan Economy Dev.zone, Wuhan
Tel:+86-27-84732152 84732116
Fax:+86-84662179
Website:www.voltec-sunmoon.com
E-mail:sunmoon@voltec-sunmoon.com

ISO9001 ℞ CE RoHS

ER 13460

3.6v Primary Lithium Thionyl Chlorde High Energy Bobbin Battery

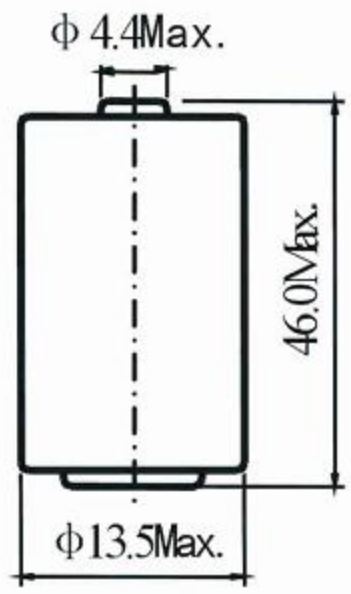

S: Standard termination

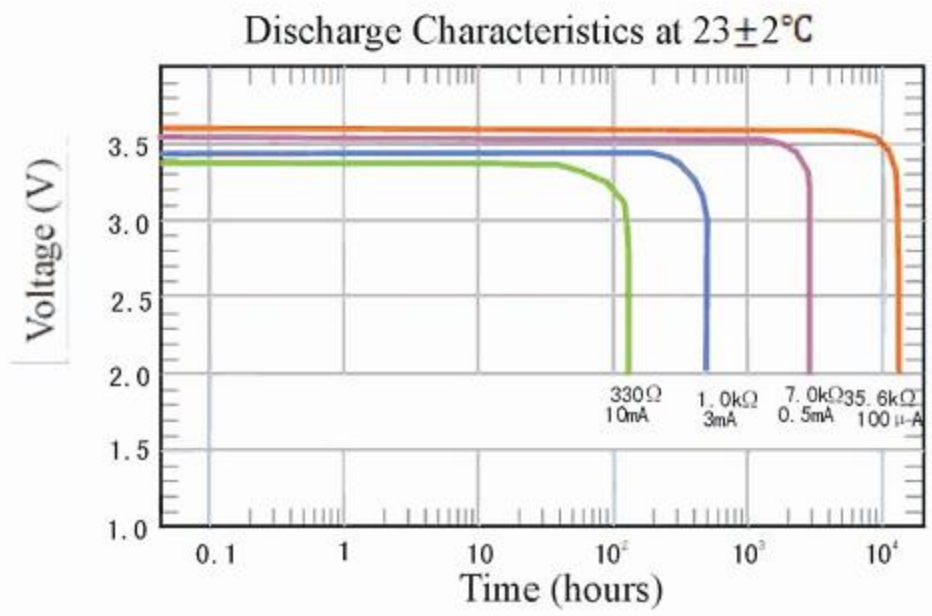

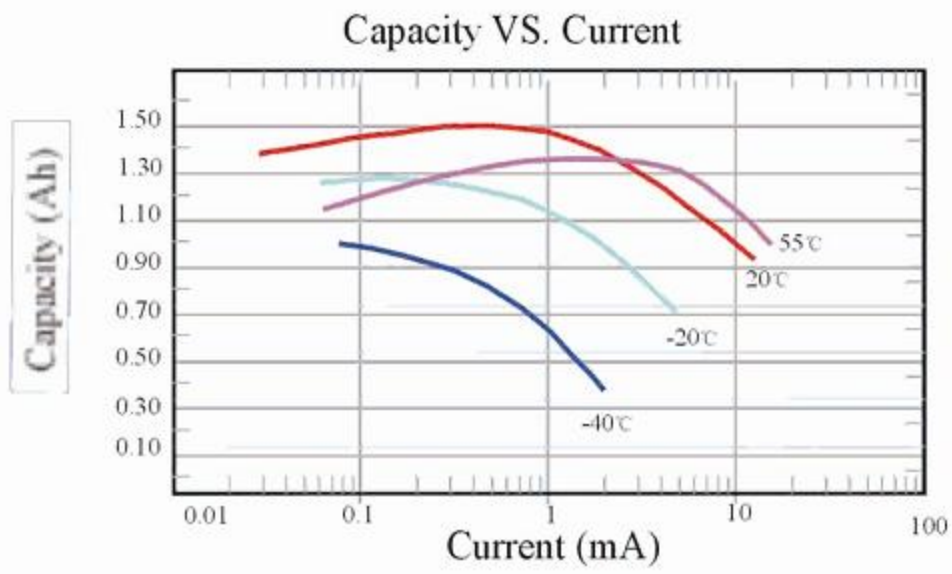

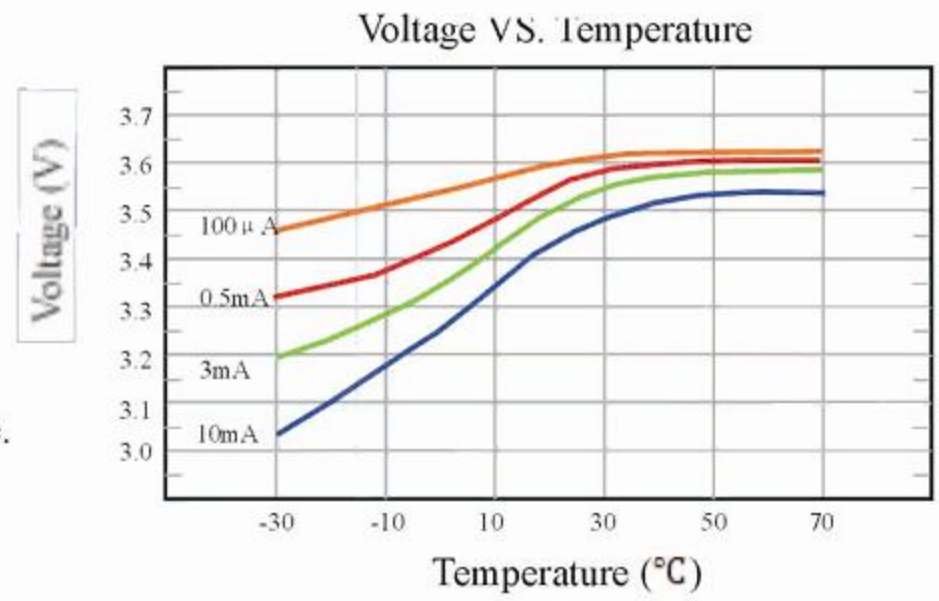

Warning:

- Fire, explosion and burn hazard.
- Do not recharge, short circuit, crush, disassemble, heat above 100°C incinerate.
- Do not use the battery beyond permitted temperature range.

Wuhan Voltec Energy Sources Co.,Ltd.

Add: Wuhan zhongyuanChangjiang Scientific Tecnology park, Nansan Road, Hannan Economy Dev.zone, Wuhan

Tel:+86-27-84732152 84732116

Fax:+86-84662179

Website:www.voltec-sunmoon.com

E-mail:sunmoon@voltec-sunmoon.com